
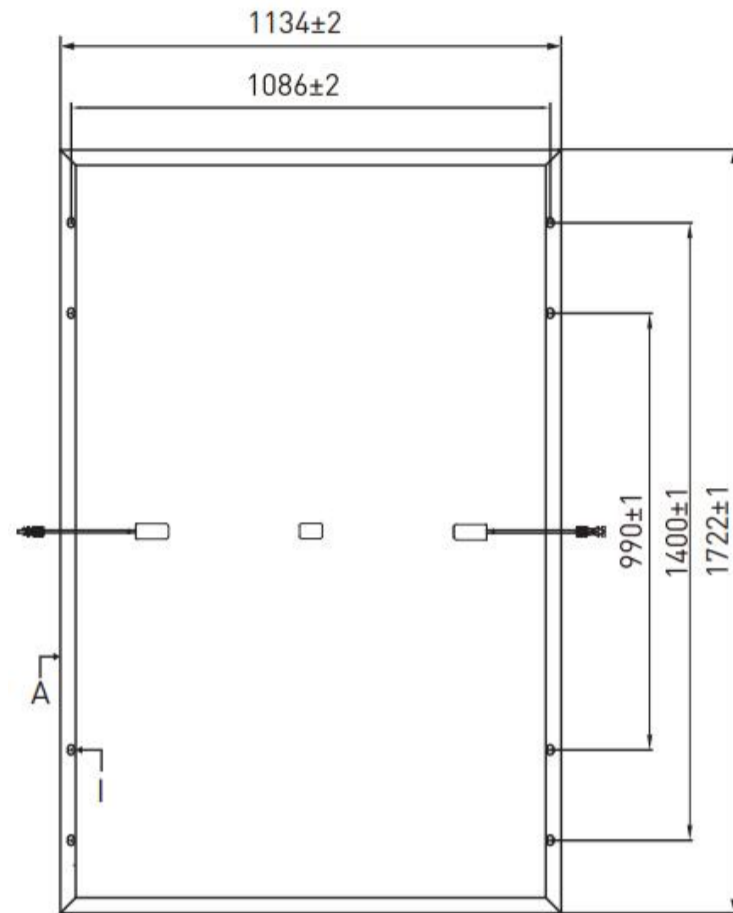


RHT-MG All Black SERIES

PERFORMANCE PARAMETERS

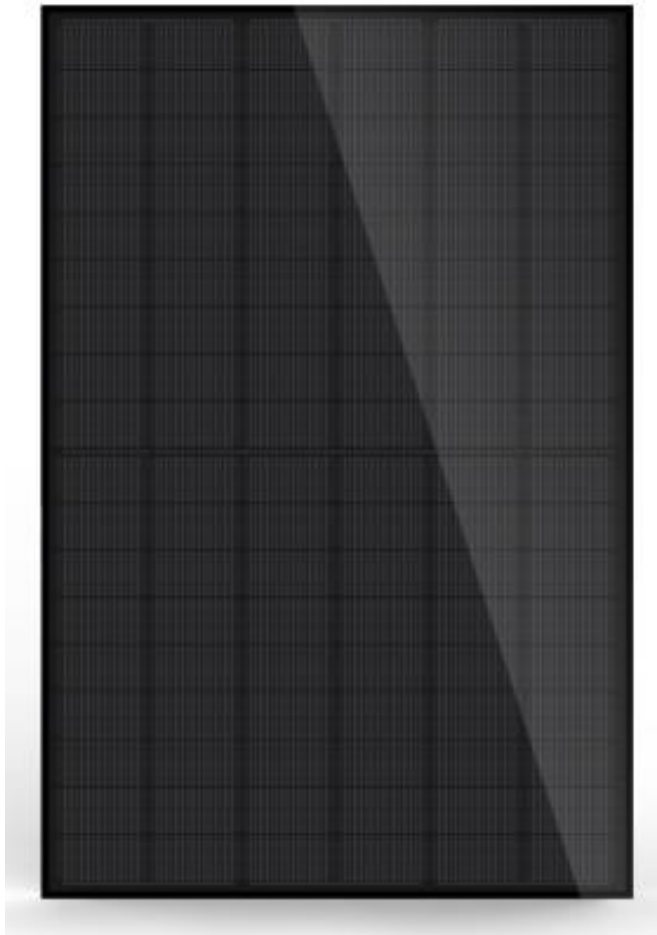

Model No.	RHT-MGA400W	RHT-MGA405W	RHT-MGA410W	RHT-MGA415W
Max Power	400W	405W	410W	415W
Max Power Voltage(Vmp)	31.01V	37.20V	37.35V	37.50V
Open-circuit Voltage(Voc)	37.05V	31.23V	31.44V	31.66V
Short-circuit Current(Isc)	13.79A	13.86A	13.93A	14.00A
Max Power Current(Imp)	12.90A	12.97A	13.04A	13.11A
Module Efficiency	20.5%	20.7%	21%	21.3%
Cell Type	182*91mm			
Dimension	1722*1134*30mm			
Weight	21.5KGS			

KEY FEATURES

- ▶ Excellent module efficiency up to 21.3%;
- ▶ IP68 junction box for long-term weather endurance;
- ▶ Heavy slow load up to 5400 Pa, wind load up to 2400 Pa;
- ▶ MBB design deduce cover of busbars and improve current collection ability on windy days;
- ▶ Applicable to hush environment of deserts, farmlands and seashores;
- ▶ Semi design deduce working temperature of operation and minimize hot-spot risk.

Renhotec Group Co.,LTD

E-mail:sale@renhoteces.com <https://renhoteces.com>

Mobile:+86 180 8661 0187

Add:No.555, Wenhua Avenue, Hongshan District 430070, Wuhan City, China

