


RHT-MG Bifacial SERIES

PERFORMANCE PARAMETERS

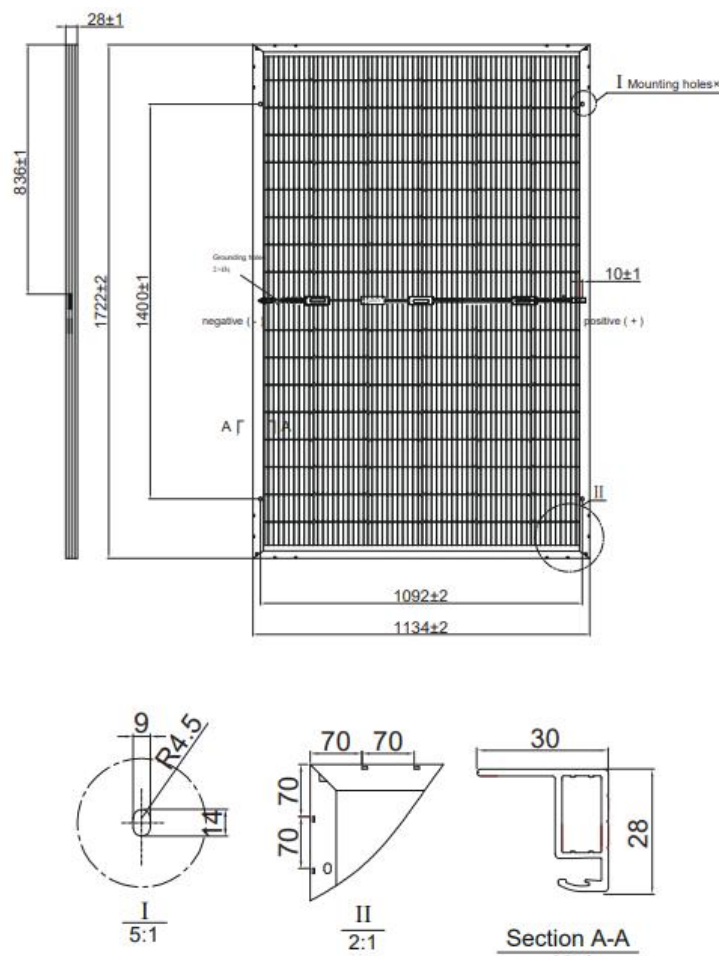

Model No.	RHT-MGB400W	RHT-MGB405W	RHT-MGB410W	RHT-MGB415W
Max Power	400W	405W	410W	415W
Open-circuit Voltage(Voc)	37.12V	37.22V	37.32V	37.42V
Max Power Voltage(Vmp)	30.81V	30.93V	31.05V	31.16V
Short-circuit Current(Isc)	13.60A	13.70A	13.80A	13.90A
Max Power Current(Imp)	12.99A	13.10A	13.21A	13.32A
Module Efficiency	20.48%	20.74%	21%	21.25%
Cell Type	182*91mm			
Dimension	1722*1134*28mm			
Weight	19.5KGS			

KEY FEATURES

- ▶ Excellent module efficiency up to 21.25%;
- ▶ IP68 junction box for long-term weather endurance;
- ▶ provide 30 years warranty of product materials and workmanship which is leading the whole industry;
- ▶ Ensured PID resistance through cell process and module material control to help harvest more.
- ▶ Applicable to hush environment of deserts, farmlands and seashores;
- ▶ Semi design deduce working temperature of operation and minimize hot-spot risk.

Renhotec Group Co.,LTD

E-mail: sale@renhoteces.com <https://renhoteces.com>

Mobile:+86 180 8661 0187

Add:No.555, Wenhua Avenue, Hongshan District 430070, Wuhan City, China

