
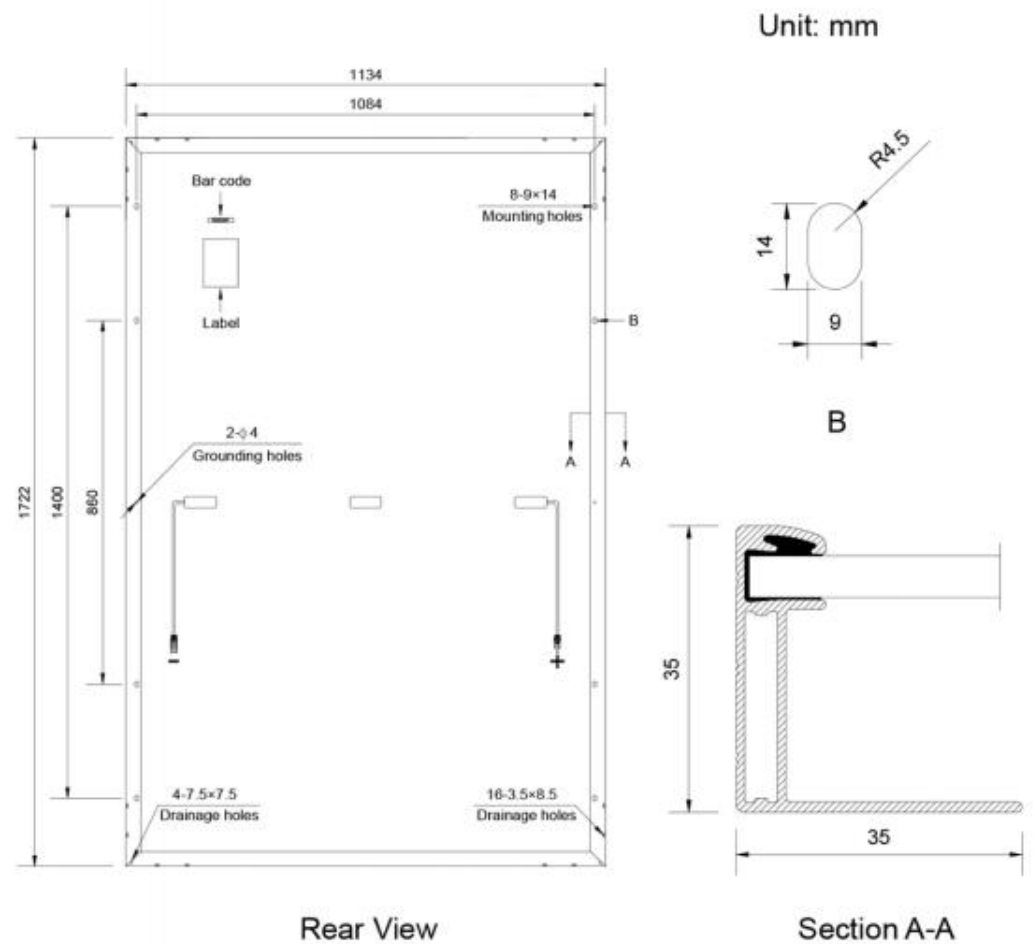


## RHT-MG Tempered SERIES

### PERFORMANCE PARAMETERS

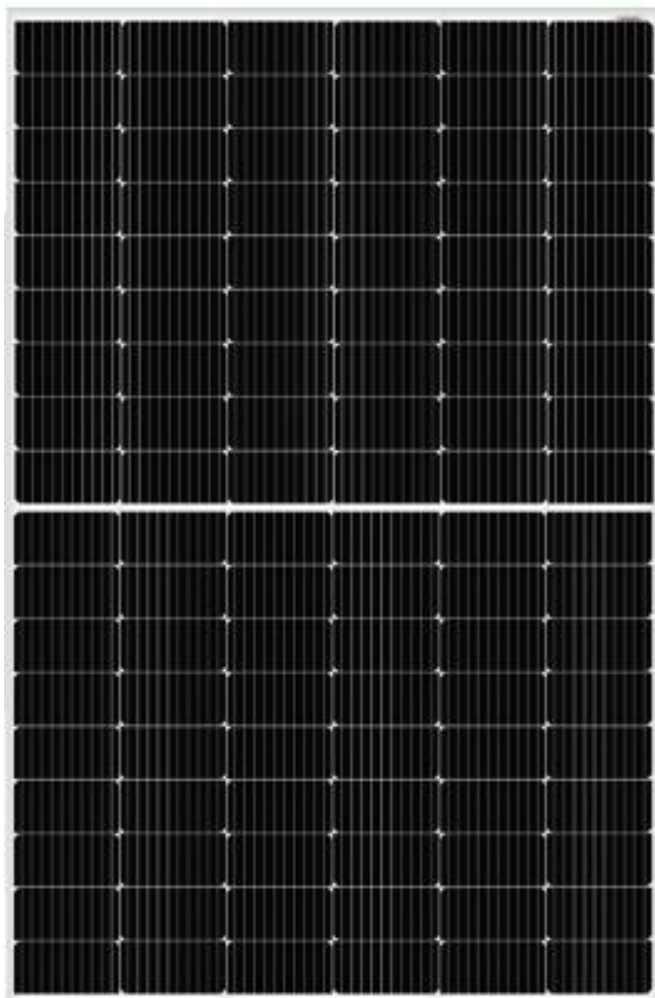

| Model No.                  | RHT-MG400W     | RHT-MG405W | RHT-MG410W | RHT-MG415W | RHT-MG420W |
|----------------------------|----------------|------------|------------|------------|------------|
| Max Power                  | 400W           | 405W       | 410W       | 415W       | 420W       |
| Open-circuit Voltage(Voc)  | 37.14V         | 37.23V     | 37.32V     | 37.41V     | 37.50V     |
| Max Power Voltage(Vmp)     | 31.01V         | 31.21V     | 31.45V     | 31.69V     | 31.93V     |
| Short-circuit Current(Isc) | 13.79A         | 13.87A     | 13.95A     | 14.03A     | 14.11A     |
| Max Power Current(Imp)     | 12.90A         | 12.98A     | 13.04A     | 13.10A     | 13.16A     |
| Module Efficiency          | 20.48%         | 20.74%     | 21%        | 21.25%     | 21.50%     |
| Cell Type                  | 182*91mm       |            |            |            |            |
| Dimension                  | 1722*1134*30mm |            |            |            |            |
| Weight                     | 20.5KGS        |            |            |            |            |

### KEY FEATURES

- ▶ Excellent module efficiency up to 21.5%;
- ▶ IP68 junction box for long-term weather endurance;
- ▶ Heavy slow load up to 5400 Pa, wind load up to 3600 Pa;
- ▶ PID: Selected material and stringent quality system ensure PID free;
- ▶ Applicable to hush environment of deserts, farmlands and seashores;
- ▶ Much lower risk of hot spot.

### Renhotec Group Co.,LTD

E-mail: [sale@renhoteces.com](mailto:sale@renhoteces.com) <https://renhoteces.com>

Mobile:+86 180 8661 0187

Add:No.555, Wenhua Avenue, Hongshan District 430070, Wuhan City, China

